

## SPM300 (MONO 275-315W)

### 60 CELL

MONOCRYSTALLINE MODULE

### 275-315W

POWER OUTPUT RANGE

### 19.2%

MAXIMUM EFFICIENCY

### 0~+5W

POSITIVE POWER TOLERANCE



Excellent low light performance on cloudy days, mornings and evenings

- Advanced surface texturing
- Back surface eld
- Selective emitter



Maximize limited space with top-end efficiency

- Up to 192W/m power density
- Low thermal coefficients for greater energy production at high operating temperatures




Highly reliable due to stringent quality control

- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- PID resistant
- 100% EL double inspection



Certified to withstand the most challenging environmental conditions

- 2400 Pa wind load
- 5400 Pa snow load
- 35 mm hail stones at 97 km/h

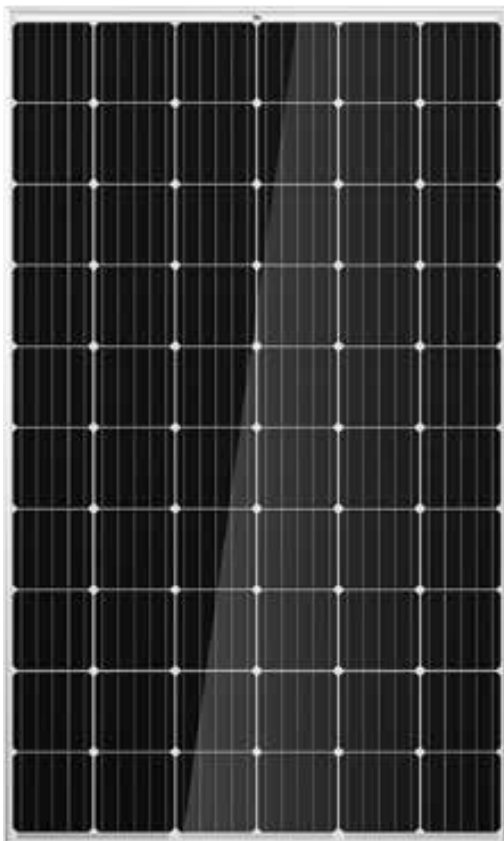

## LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty · 25 Year Linear Power Warranty

